


AI-2057 Touch Screen Paperless Recorder 32 Channel Recording and Monitoring System



AI-2057,
5.7 inch Panel



AI-7048,
22.5mm slim design with FOUR
individual SSR Output

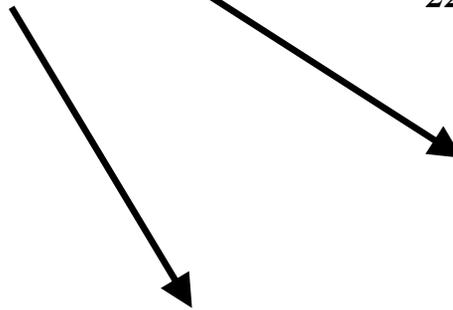

时间	CH1	CH2	CH3	CH4	CH5
2007-1-22 8:13	33.5	43.5	53.5	63.5	63.5
2007-1-22 8:13	33.5	43.5	53.5	63.5	63.5
2007-1-22 8:13	33.6	43.6	53.6	63.6	63.6
2007-1-22 8:13	33.6	43.6	53.6	63.6	63.6
2007-1-22 8:13	33.6	43.6	53.6	63.6	63.6
2007-1-22 8:13	33.6	43.6	53.6	63.6	63.6

Efficiency:

Data can be export to EXCAL by CF card reader or RS 232 Cable



Visualization:

Up to display 4 Real Time Curve

Convenient:

All software was programmed.



Technical Specification

Display :	5.7 inch ,Color STN LCD
Screen Resolution :	320 x 240 (QVGA)
Effective show size :	115.2 W x 86 H mm
Supply Voltage :	DC24V
Supply Voltage Range :	DC19.2V ~ DC28.8V
Recording time :	6 Sec. per period
Protection Level :	Equivalent to IP65 (Surface)
Communication :	RS485, RS232
Operating Ambient :	Temp.-20~60 °C; humidity ≤90%RH
Support 1~4 G CF Card	